


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

中文黑体
 Chinese bold

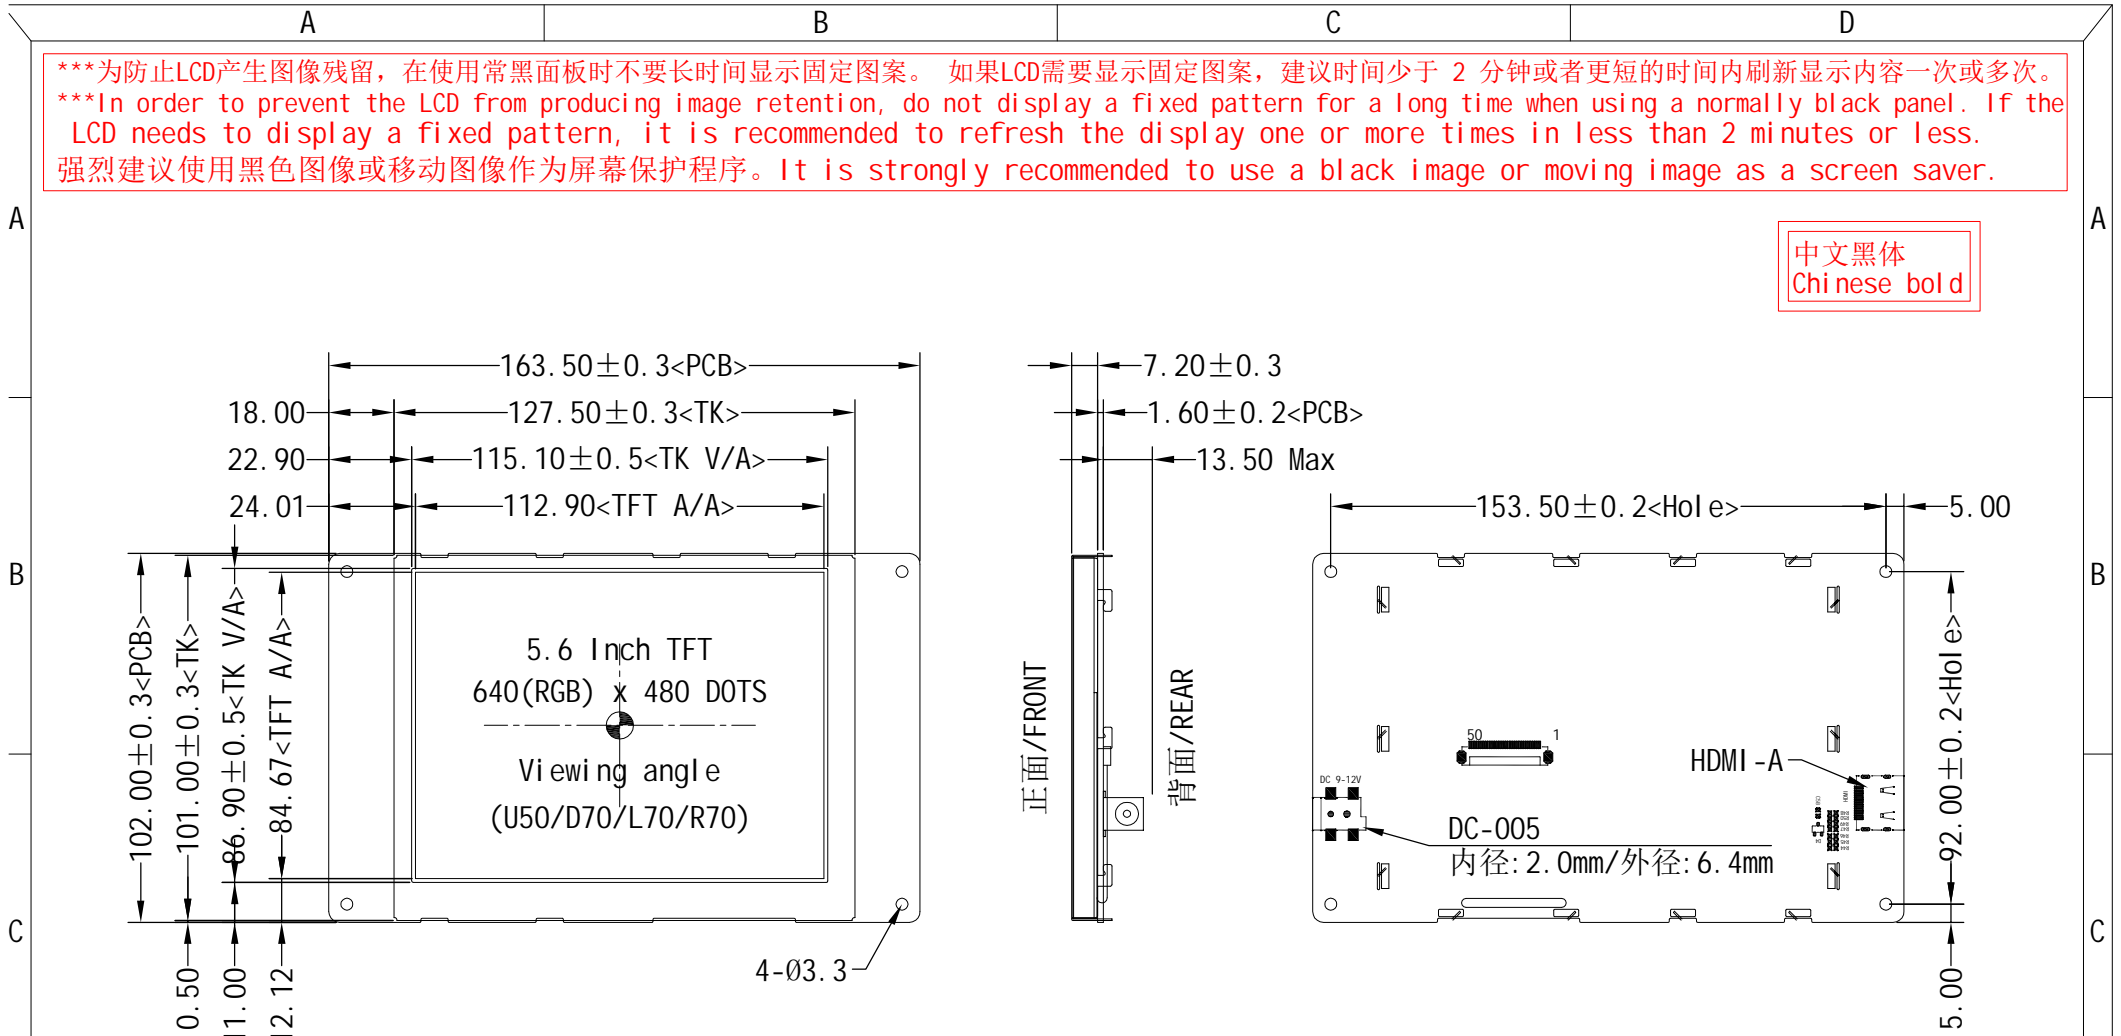

液晶显示类型 LCD Display Type	薄膜晶体管/透射式/常白 TFT/Transmissive/Normally White
观看方向/角度 Viewing Direction	Viewing angle(U50/D70/L70/R70)
接口 Interface	HDMI 1.4& HDCP1.4
工作电压 Operating Voltage	VDDIN= DC 9 ~ 12V/1A(Typ)
TFT 工作温度 TFT Operating Temp	-10 °C ~ 60 °C
TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C
液晶模组亮度 LCM Brightness	200 cd/m ² (Typ)

HOTHMI

产品型号
 Product model **HTM-H056A01-HDMI-A01**

比例 Scale 1:1	设计制图 Design Liu.YL	日期 Date 2023-09-11
版本 Ver VO-0	单位 Unit MM	公差 Tol. ±0.3