

# LCM Specification

Preliminary specification

Final Specification

Project No. 项目编号	TFT-H07001WSIF8C40		
Customer 客户名称			
Module No. 客户型号			
Product type 产品内容	TFT LCD Module 1024x 3RGB x 600Dots 7.0" TFT LCD		
Signature by customer: 客户确认签章:			
<input type="checkbox"/> Trial production <input type="checkbox"/> Mass production			
编 制	电子审核	结构审核	批 准
Y. L			

深圳市鑫洪泰电子科技有限公司

Shenzhen Hot Display Technology Co., Ltd


**1 Document revision history :**

DOCUMENT REVISION	DATE	DESCRIPTION	PREPARED BY	APPROVED BY
A	2019-3-27	First Release.	Y.L	

## 1. General Feature:

Item	Standard Value	Unit
Display Size	7.0"	--
Number of Pixels	1024(H)x3(RGB)*600(V)	--
Active Area	154.2144(H) *85.92(V)	mm
Outline Dimension	177.8(H) ×115.8× 7.875(V)	mm
Viewing Direction	FULL O'Clock	-
Interface	TTL 24 bit	-
Panel Driver IC	EK79001+EK73215	-
Panel Driver Condition	VDD=3.3V	V
Backlight	White LED	-
Touch Panel	Capacitive Touch Panel	-
Cap Touch Driver IC	FT5426	-
Cap Touch Driver Condition	VDD=3.3V	V
Operation Temperature	-20~70	°C
Storage Temperature	-30~80	°C

## 2.Outline Dimensions

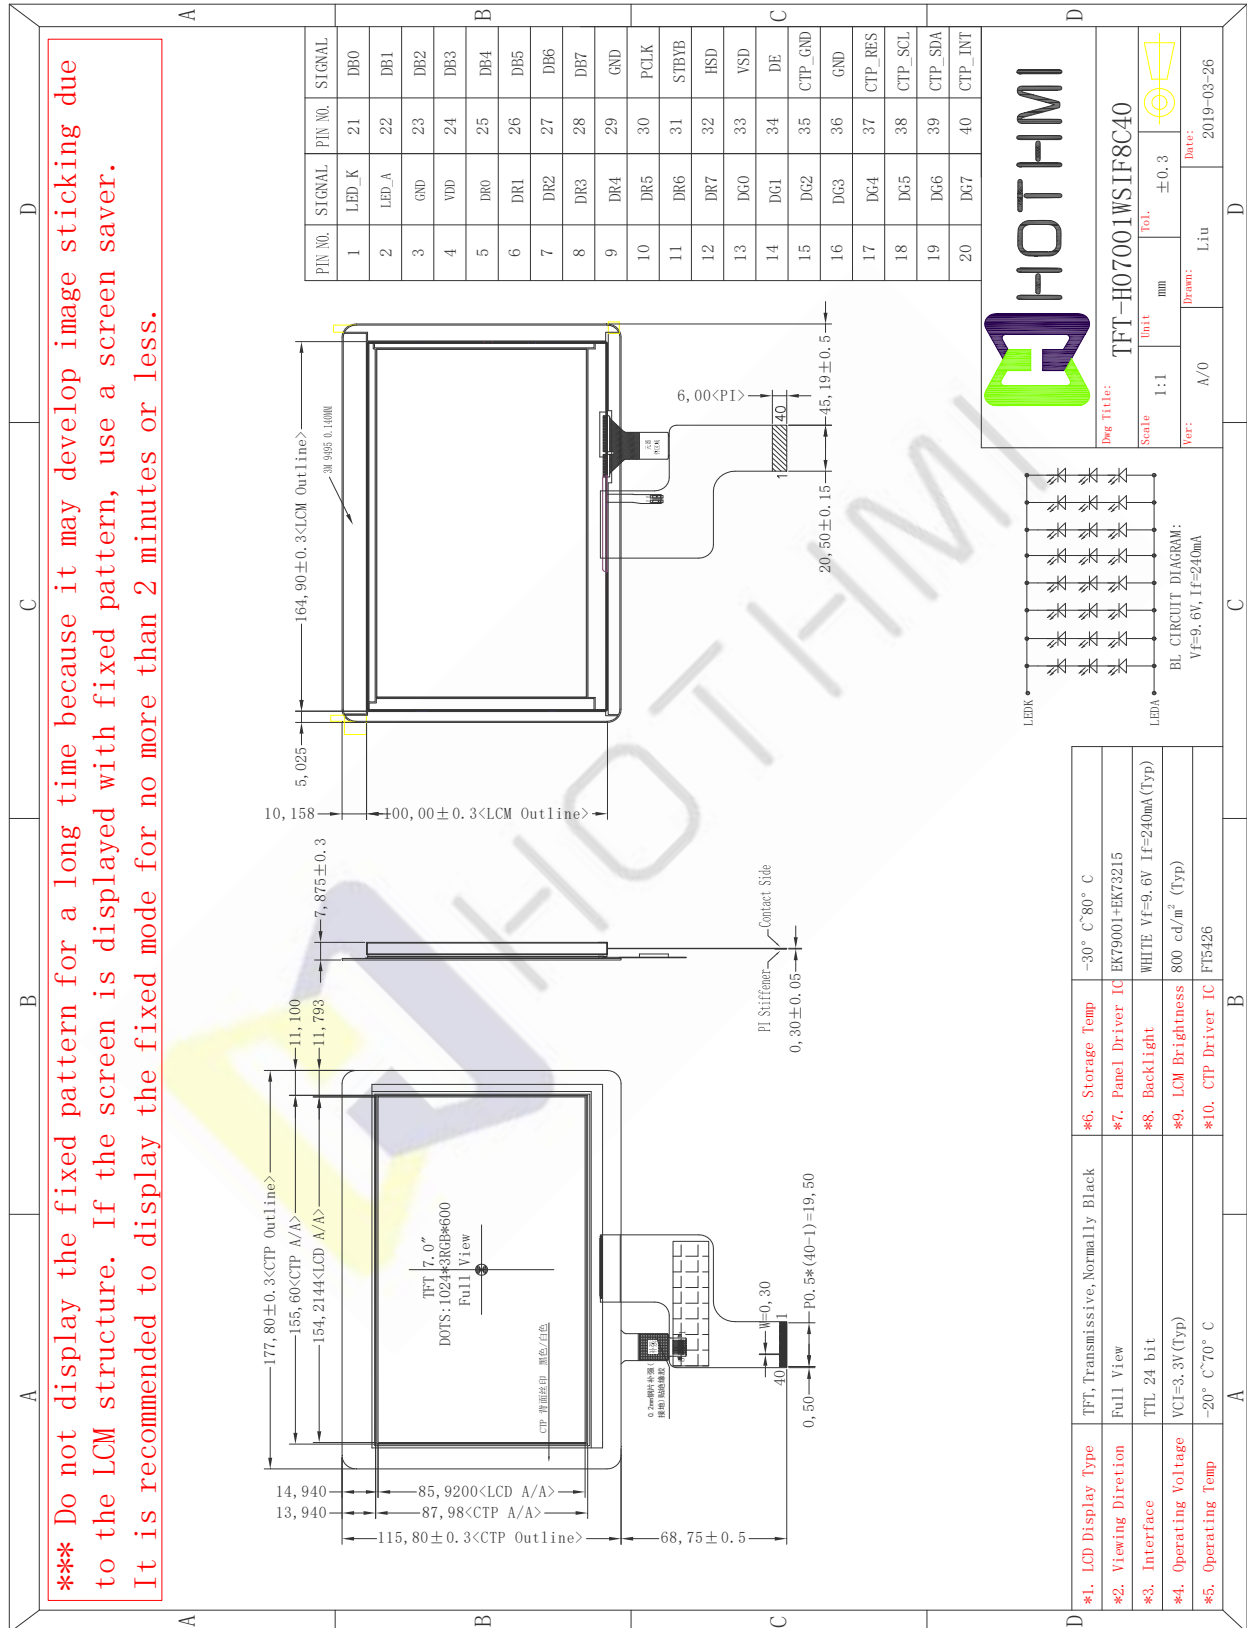


### 3. Pin Description

#### 3.1 Pin Description

Pin NO.	Symbol	Description
1	LED_K	LED Cathode
2	LED_A	LED Anode(+9.6V/240mA)
3	GND	Ground
4	VDD	Analog Power(2.5 ~ 3.6 V)
5-12	DR0-DR7	Red data bus
13-20	DG0-DG7	Green data bus
21-28	DB0-DB7	Blue data bus
29	GND	Ground
30	PCLK	Clock signal for data latching
31	STBYB	Display on/off mode control
32	HSD	Horizontal sync input with negative polarity
33	VSD	Vertical sync input with negative polarity
34	DE	Input data enable control / no connection
35	CTP_GND	Cap Touch panel Ground
36	GND	Ground
37	CTP_RES	Cap Touch panel Reset
38	CTP_SCL	Cap Touch panel SCL Data
39	CTP_SDA	Cap Touch panel SDA Data
40	CTP_INT	Cap Touch panel Interrupt
-END-		

#### 3.2 Wiring Diagram

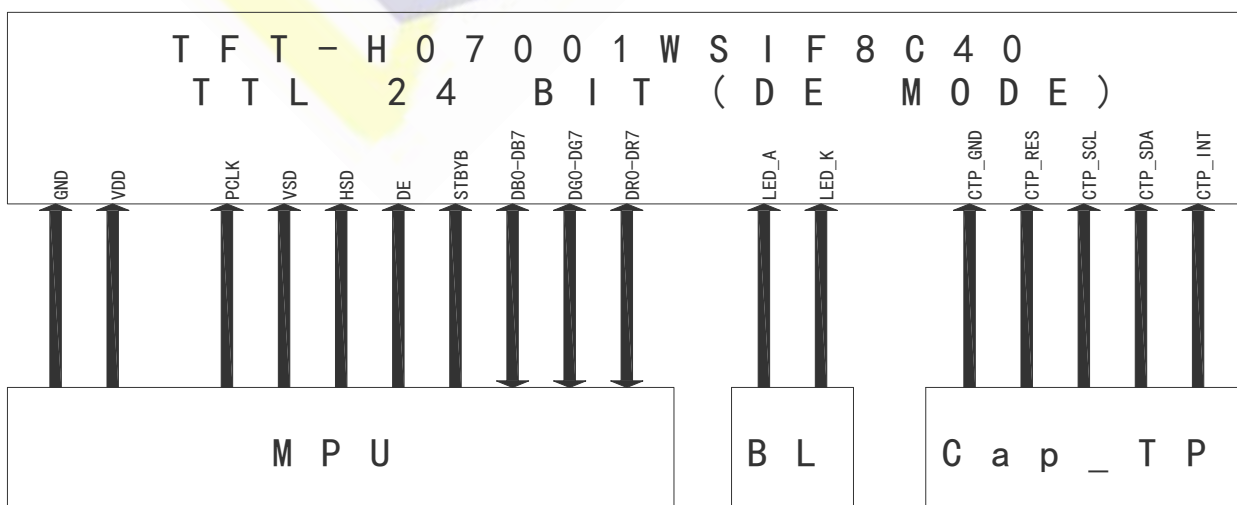

## 4. OPTICAL SPECIFICATION

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	$\Theta_3$	CR > 10	-	85	-	Deg.	WV-Pol Note 1
		$\Theta_9$		-	85	-	Deg.	
	Vertical	$\Theta_{12}$		-	85	-	Deg.	
		$\Theta_6$		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	800	-		Note 2
Cell Transmittance		Tr		4.8	5.0	-	%	Base on C Light Note 3
White Chromaticity		$x_w$		TYP. - 0.03	TYP. + 0.03	0.308		Note 4 Base on C Light
		$y_w$				0.336		
Red	$R_x$	0.599						
	$R_y$	0.338						
Green	$G_x$	0.299						
	$G_y$	0.550						
Blue	$B_x$	0.139						
	$B_y$	0.131						
Color Gamut (C light)			-	50	-	%		
Response Time (Rising + Falling)		$T_{RT}$	$T_a = 25^\circ C$ $\Theta = 0^\circ$	-	30	40	ms	Note 5


Note :

- Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o' clock direction and the vertical or 6, 12 o' clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 5).
- Contrast measurements shall be made at viewing angle of  $\Theta = 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see FIGURE 5) Luminance Contrast Ratio (CR) is defined mathematically.  


$$CR = \text{Luminance when displaying a white raster} / \text{Luminance when displaying a black raster}$$
- Transmittance is the Value with Polarizer.
- The color chromaticity coordinates specified in Table 6 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

5. The electro-optical response time measurements shall be made as FIGURE 6 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_r$ , and 90% to 10% is  $T_d$ .


**Figure 4. The Definition of  $V_{th}$  &  $V_{sat}$**

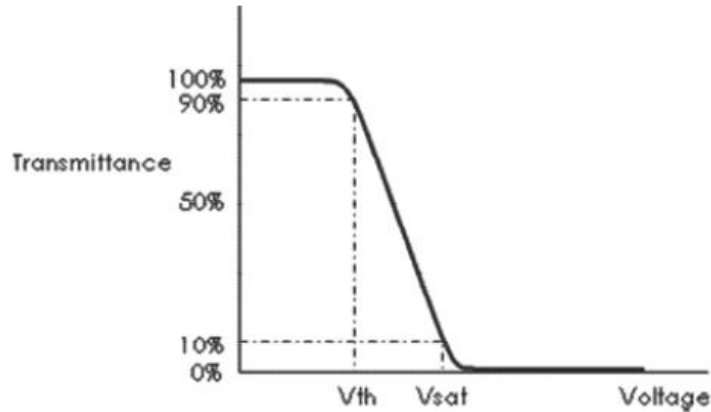

**Figure 5. Measurement Set Up**

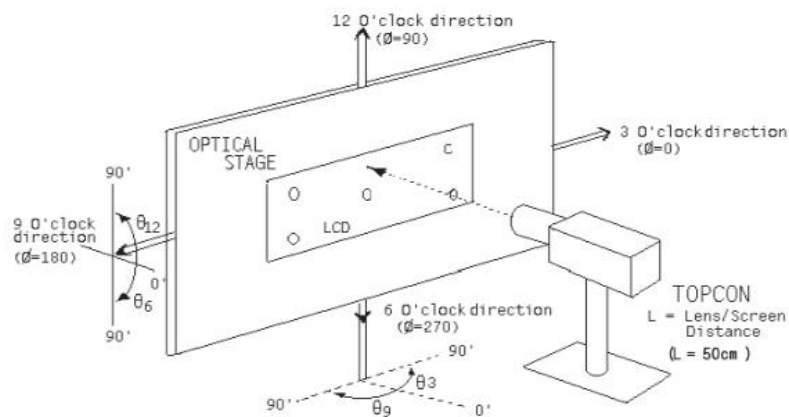

**Figure 6. Response Time Testing**

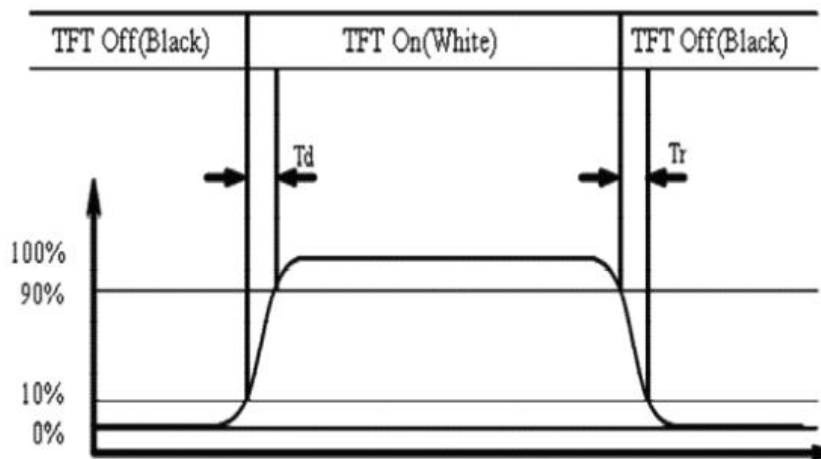

## 5. Electrical Characteristics

### 5-1 TFT LCD Module Operating Conditions

Item	Symbol	Condition	Min	Type	Max	Unit
Analog Power supply	VDD	-	2.70	3.3	3.6	V
TFT Gate on voltage	VGH	-	-	18	-	V
TFT Gate off voltage	VGL	-	-	-6	-	V
TFT Common Electrode Voltage	VCOMH	-	-	3.3	-	V
	VCOML	-	-	3.1	-	


### 5-2 LED back light specification

Item	Symbol	Condition	Min	Type	Max	Unit
Forward voltage	Vt	If=20mA	-	9.6	-	V
Forward current	Ipn	/1-chip	-	240	-	mA
Luminance(With LCD)	Lv	If=100mA	-	800	-	cd/m2
Luminous color	White					


## 6. Timing Characteristics of Input Signals

### 6-1 Panel Data Input Format for TTL Interface

#### 6-1-1 Vertical input timing

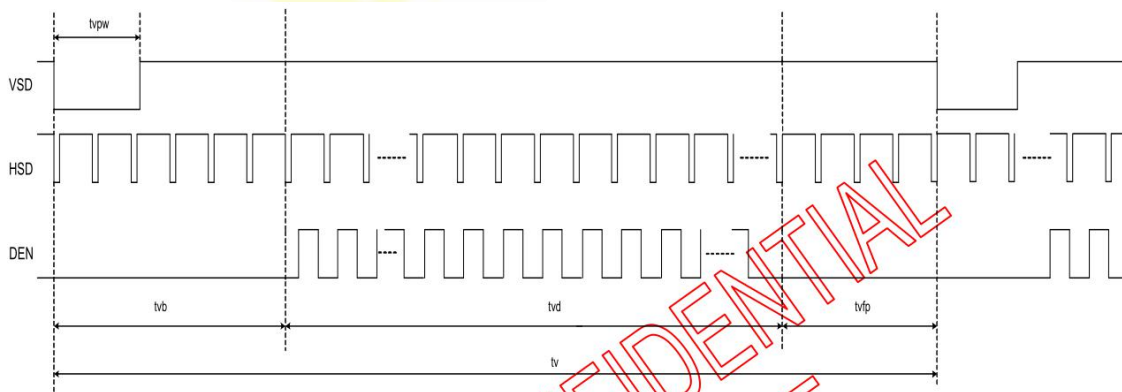

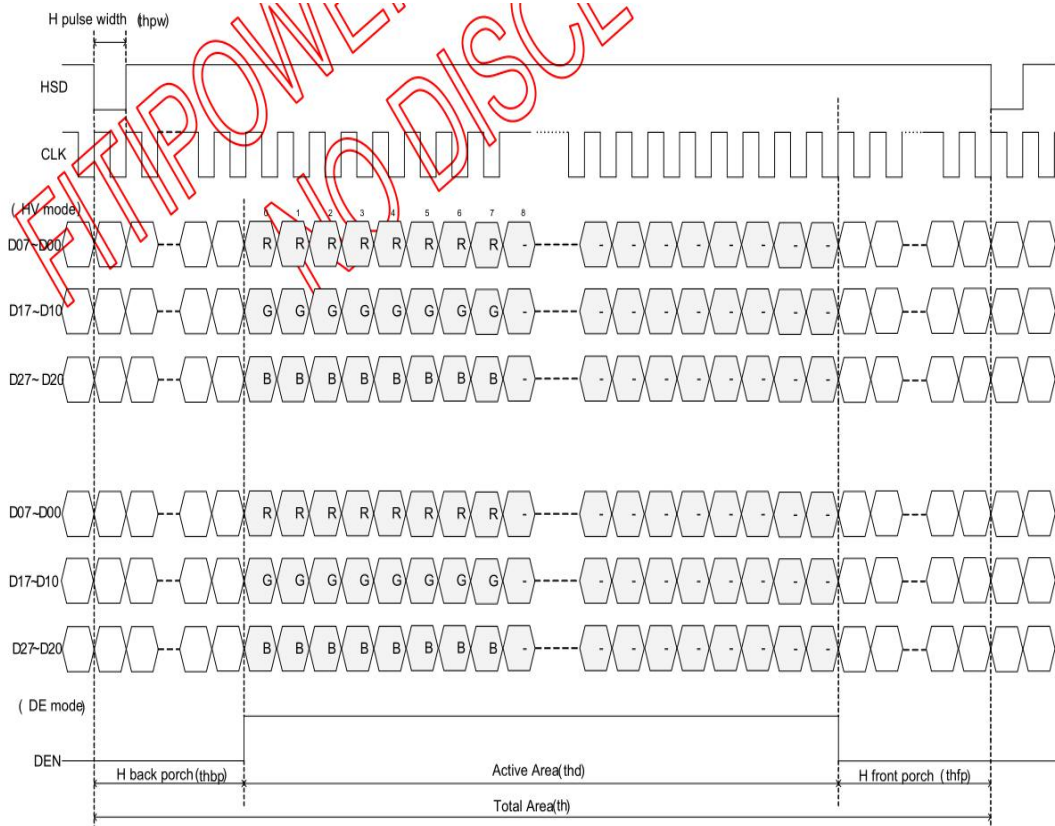

**6-1-2 Horizontal input timing**

**6-1-3 Horizontal input timing**


DE mode

DE mode


Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency @Frame rate=60hz	fclk	40.8	51.2	67.2	Mhz
Horizontal display area	thd	1024			DCLK
HSYNC period time	th	1114	1344	1400	DCLK
HSYNC blanking	thb+thfp	90	320	376	DCLK
Vertical display area	tvd	600			H
VSYNC period time	tv	610	635	800	H
VSYNC blanking	tvb+tvfp	10	35	200	H

## 6-2 CTP Timing Characteristics

### 6-1-1 Host Interface

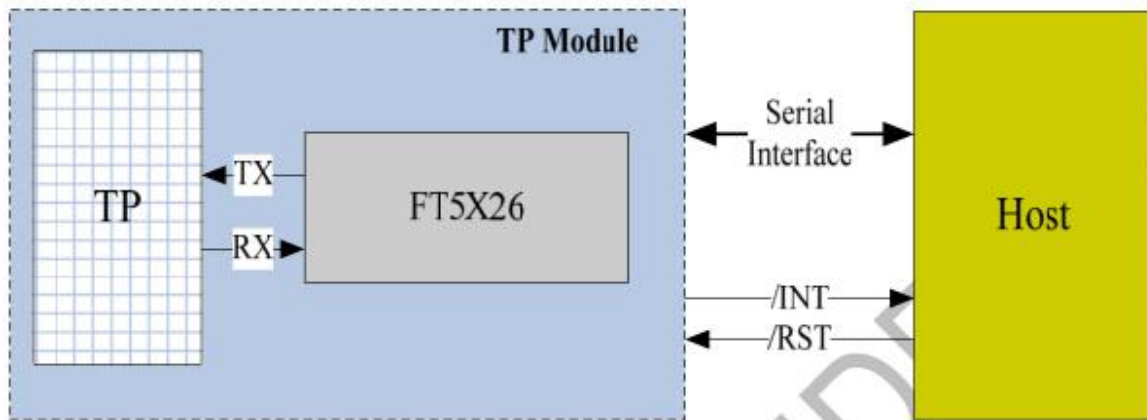

### 6-1-2 I2C Serial Data Transfer Format

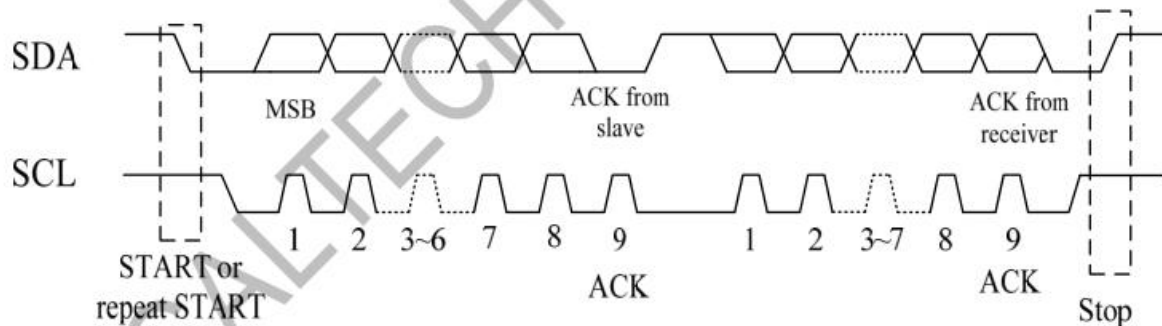

### 6-1-3 I2C Interface Timing Characteristics

Parameter	Min	Max	Unit
SCL frequency	0	400	KHz
Bus free time between a STOP and START condition	1.3		us
Hold time (repeated) START condition	0.6		us
Data setup time	100		ns
Setup time for a repeated START condition	0.6		us
Setup Time for STOP condition	0.6		us


## 7. RELIABILITY TEST

### 7-1 Temperature and Humidity

TEST ITEMS	CONDITIONS	NOTE
High Temperature Operation	60°C ; 120hrs	
High Temperature Storage	70°C ; 120hrs	
High Temperature High Humidity Operation	60°C; 90%RH ; 120hrs (No condensation)	
Low Temperature Operation	-10°C ; 120hrs	
Low Temperature Storage	-20°C ; 120hrs	
Thermal Shock	-30°C (0.5hr) ~ 80°C (0.5hr) ; 100 Cycles	Non-Operating
Image Sticking	25°C ; 2hrs	1

Note 1: Condition of Image Sticking test: 25°C ±2°C

Operation with test pattern sustained for 4 hrs, then change to gray pattern immediately. After 5 mins, the mura must be disappeared completely .

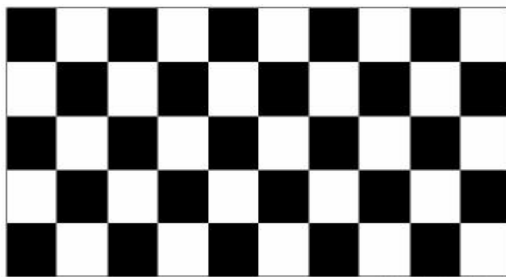

(a) Test Pattern (chess board Pattern )



(b) Gray Pattern

### 7-2 Shock and Vibration

ITEMS	CONDITIONS
Packing Shock (Non-Operation)	<ul style="list-style-type: none"> <li>● Shock level:980m/s<sup>2</sup></li> <li>● Waveform:1/2 Sine wave,6msec</li> <li>● ±X, ±Y ±Z,each axis 1 times</li> </ul>
Packing Vibration (Non-Operation)	<ul style="list-style-type: none"> <li>● Frequency range:8-33.3HZ</li> <li>● Stoke:1.0mm</li> <li>● Sweep: 10Hz-50Hz</li> <li>● x,y,z 2 hours for each direction</li> </ul>

### 7-3 Electrostatic Discharge

TEST ITEM	CONDITIONS
ESD (Non-operation)	150pF,330Ω , Contact±4KV,Air :±8KV.Note 1
	200pF,0Ω , ±200V Contact test.Note 2

Note:Measure Point:

- 1.LCD glass and metal bezel
- 2.IF connector pins

## 8.HANDDLING & CAUTIONS

### 8-1 Caution For Operation

◆Since the LCM is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass maybe broken.

◆It is indispensable to drive the LCM within the specified voltage limit since the higher voltage than the limit causes LCM's life shorter. An electro-chemical reaction due to DC causes undesirable deterioration of the LCM so that the use of DC drive should avoid.

◆Do not connect or disconnect the LCM to or from the system when power is on.

◆Never use the LCM under abnormal conditions of high temperature and high humidity.

◆When expose to drastic fluctuation of temperature(hot to cold or cold to hot), the LCM may be affected; specifically, drastic temperature fluctuation from cold to hot, produces dew on the LCM's surface which may affect the operation of the polarizer on the LCM.

◆Response time will be extremely delay at lower temperature than the operating temperature range and on the other hand LCM may turn black at temperature above its operational range. However those phenomenon do not mean malfunction or out of order with the LCM. The LCM will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.

◆Do not display the fixed pattern for a long time because it may develop image sticking due to the LCM structure. If the screen is displayed with fixed pattern, use a screen saver. It is recommended to display the fixed mode for no more than 2 minutes or less.

◆Do not disassemble and/or re-assemble LCM module

### 8-2 Caution Against Static Charge

◆The LCM use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.

◆Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, if possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.

◆Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.

◆In handling the LCM, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary

## 9.LCD display initialization code

**This product does not require initialization code driver**

**-END-**